

Item No.:1524-3000-Neon




Beam Angle




**Min. Bending
Diameter**



**Flame
Resistant**



UV Resistant



**Saltwater
Resistant**




**IP67
Protection**

Product parameters:


Absolute Maximum Rating at TA=25°C

Parameter	Mark	Rated Value	Unit
Forward Voltage DC	VF	24VDC	V
Forward Current	IF	600	mA/M
Power	PD	14.4	W/M
CRI	Ra	90+	/
Luminous Flux	Φ	2900-3200K 860LM	Lm (1M)
Width	W	9.4	mm
Thickness	T	10	mm
Min.Bending Diameter	R	≥120	mm
IP Grade	IP	IP67 U Tube & Frosted PU	/
Color	/	•2900-3200K	K


Installation

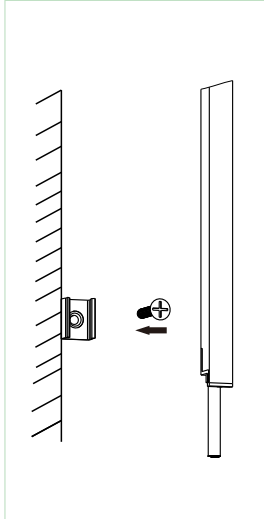

First, fix the clips onto the wall.

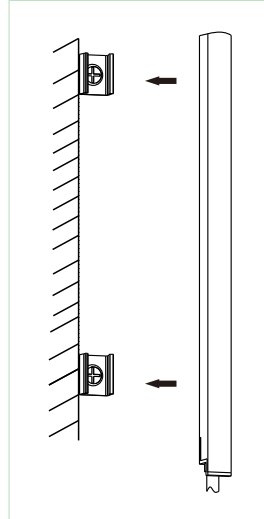

Second, push the neon light all the way down to the clips.

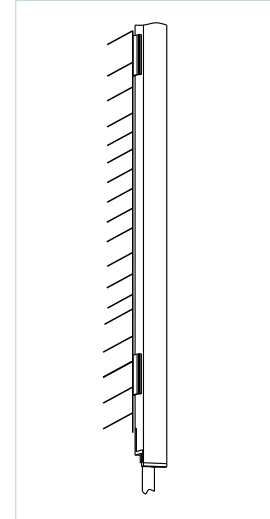

Third, check the polarity and connect the cables to the power supply.

Product Features

1. Low voltage DC24V.
2. End strip width in 9.4mm and thickness in 10mm.
3. 240 leds per meter with super bright, 14.4w/m.
4. Uniform&even light source with no LED “hotspots” and three-dimensional emitting.
5. More durable and flexible with 120mm minimum bending diameter.
6. Easy for transportation and installation.

Aluminum Profile For LED Flexneon

