




Product Specification


Item No.:1524-....-5-90+ (Neon-Side View)



Beam Angle

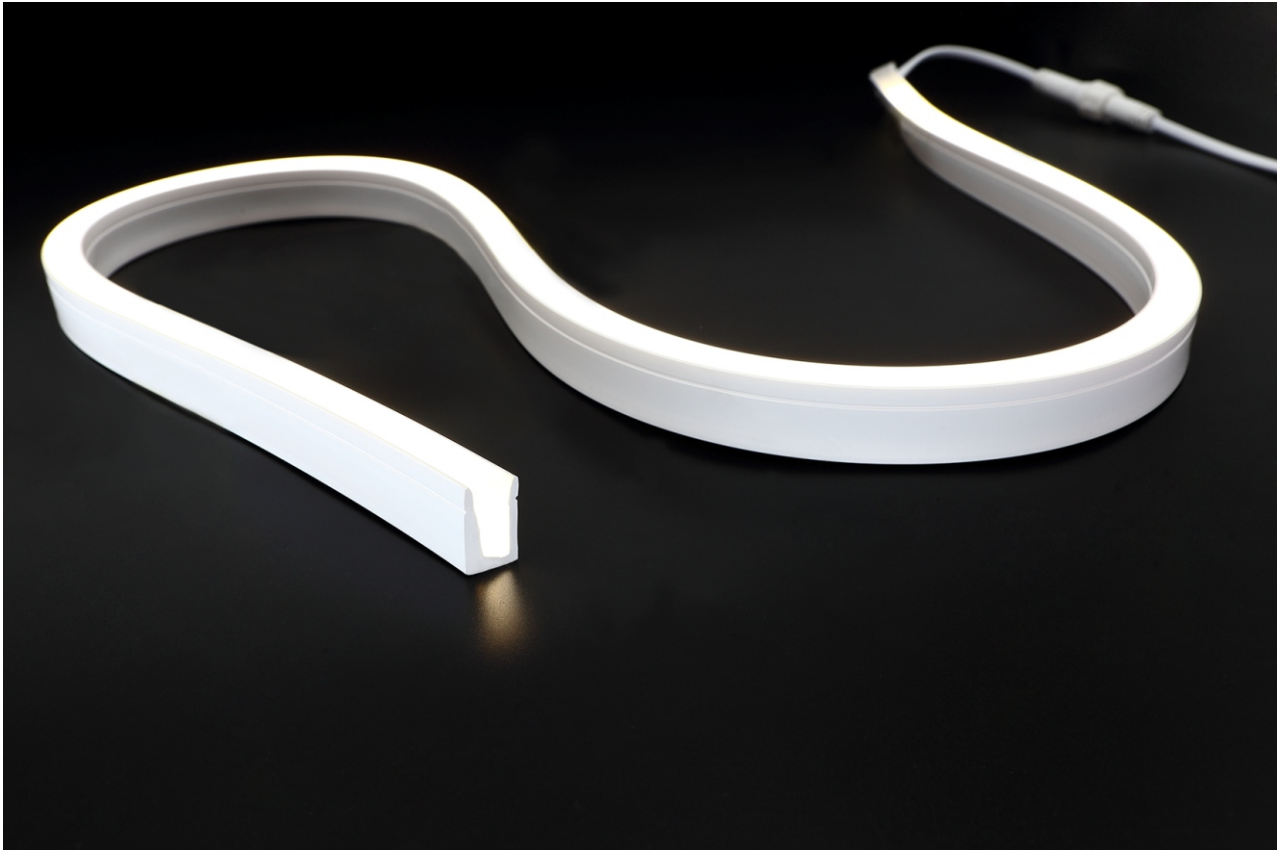

Min. Bending
Diameter



UV Resistant




IP67
Protection

Product parameters:


Absolute Maximum Rating at TA=25°C

Parameter	Mark	Rated Value	Unit
Forward Voltage DC	VF	24VDC	V
Forward Current	IF	600	mA/M
Power	PD	<14.4	W/M
CRI	Ra	90+	/
Luminous Flux	Φ	2300-2500K 350LM 2700-2900K 400LM 3300-3600K 400LM 3800-4300K 420LM	Lm (1M)
Width	W	11	mm
Thickness	T	20	mm
Min.Bending Diameter	R	≥120	mm
IP Grade	IP	IP67	/


Installation

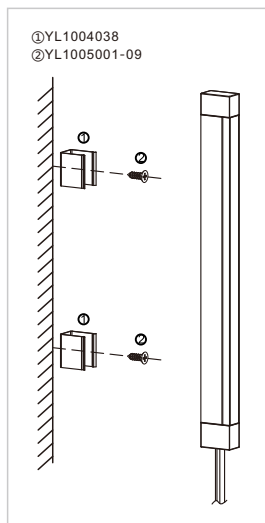

First, fix the clips onto the wall.

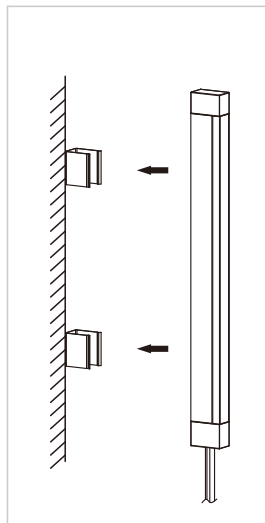

Second, push the neon light all the way down to the clips.

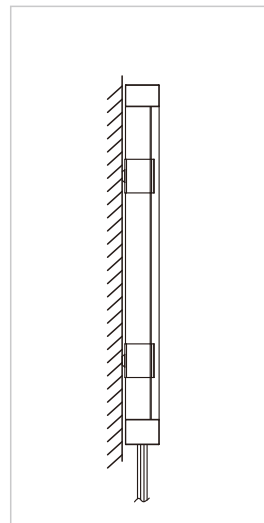

Third, check the polarity and connect the cables to the power supply.

Product Features

1. IP67 Neon flex,side view version,dimension:11x20mm .
2. Material:silicon tube.
3. Low voltage 24VDC.
4. Single color.
5. High light efficiency.

Accessories



Y0409797(male 2PIN)
Y0409798(female 2PIN)