




2324-3000-5-160-90



Product Features

- Abundant CCT option: 1800K|2100K|2300K|2700K|3000K|3500K|4000K|5000K|6500K.
- White,brown,black FPC for option,but our standard FPC color is white.
- Low consumption, excellent and reliable stability.
- Long lifetime (>50 000h).
- Indoor 5 years warranty and Outdoor 3 years warranty.

Drawing

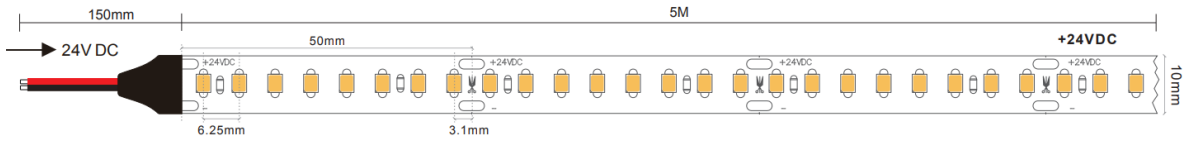

Product parameters

Absolute Maximum Rating at TA=25gr

Parameter	Mark	Rated Value	Unit
Forward Voltage DC	VF	24vDC	V
Forward Current	IF	950	mA/M
Power	PD	23	
CRI	Ra	90+	
Luminous Flux		3278	Lm (1m)
PCB Width	W	10	mm
Copper Thickness	T	3	OZ
Min. Ellement Size	L	50	mm
Min. Buckling Radius	R	>50	mm
Angle	281/2	120	deg
Static Electricity	ESD	800	v
Working Temp.	Topr	-20/+40	gr
Working Humidity	RH	90	%
Storage Temp.	Tstg	-40/+80	gr
Junction Temp.	Tj	115	gr
IP Grade	IP	IP20	
LED Color Temperture	CCT	3000K	K